
## Fact sheet The Baufritz A wall





Our Baufritz A wall: 37 cm thick (varies depending on the façade design) energy-efficient wall with U-value= $0.20 \, \text{W/m}^2 \cdot \text{K}$  (or  $0.16 \, \text{W/m}^2 \cdot \text{K}$  with mineral render finish).

Choose the Baufritz AA or AAA wall based on sustainability principles with thermal insulation values of as low as 0.14 W/m<sup>2</sup>·K for use in PlusEnergy, solar or passive houses. Subject to modifications.

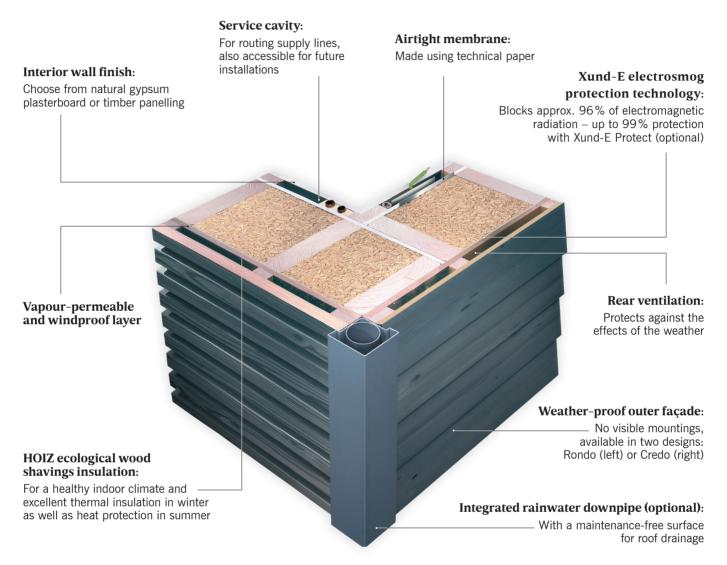